




3 Series Commercial Grade Cushion-Lok™
for Tempered Glass Doors Without Frames

In or Out...we make it Easy!™

Dimensions
5-3/4" x 1-9/16"



Features & Benefits

- Unique pivot ensures gentle, shock-absorbing encapsulation of fixed locking bolt.
- Specify 10mm or 12mm to accommodate glass thickness.
- Available in 12 or 24 VDC.
- May be used on single or pairs of herculite glass doors, with glass side-lite or transom panels.
- Extruded aluminum slotted housing adheres to surface of the glass (adhesive included).
- All locks are "fail unlocked" by fire alarm or any power loss, ensuring life safety.
- Electrical design prevents damage due to crossed wires.
- Consult with your electric wire supplier for self-adhesive or decorative vision barrier conductors.
- Anodized clear aluminum finish.

Tempered Glass Door Lock

RCI offers the 3360 solution for securing tempered glass doors. This sleek glass door lock allows you to electrically control single, or pairs of tempered glass doors (without rails) which are surrounded by glass side-lites and transoms. This unique locking device will retrofit onto a glass door and glass side-lite (transom for pairs).

The 3360 Cushion-Lok™ is a small, attractive, surface-mounted lock that consists of two parts – the electrical portion which mounts onto the side-lite (transom for pairs) and the mechanical portion which incorporates a fixed locking bolt that mounts onto the glass door edge (top for pairs), both of which are secured using adhesive supplied.

Highlights


- No preparation required for glass doors
- Shock-absorbing action
- Non-handed (reversible)
- 3-year limited warranty

Applications

- Commercial Centers
- Industrial Buildings
- Educational Facilities
- Health Care Facilities
- Retail Outlets
- Office Complexes

Options

LMS – Latch Monitor Switch
Special Finishes – 4/P28/B




Lock
Strength




In or Out...we make it Easy!™

CUSHION-LOK™ FOR TEMPERED GLASS DOORS WITH NO FRAME

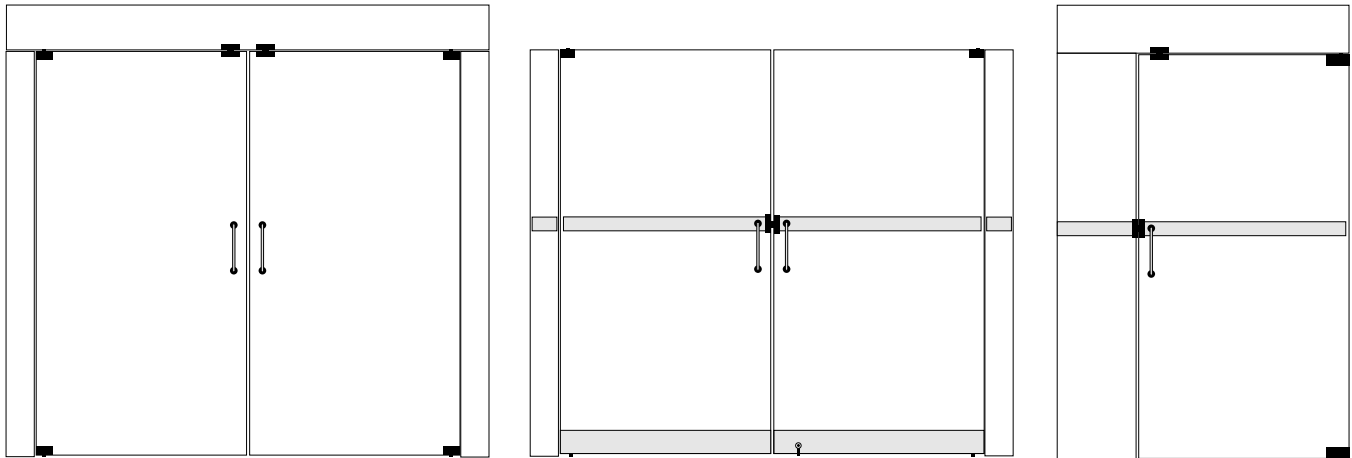

Specifications								
Model	Mode	Code	Voltage	Current	Duty	Sound	Amps	Ohms
3360	Fail Unlocked	06	12V	DC	Continuous	Silent	0.20	61
3360	Fail Unlocked	09	24V	DC	Continuous	Silent	0.11	215

Fail Unlocked = Fail Safe = PL; DC = Direct Current; Intermittent Duty = Energized less than 1 min.; Continuous Duty = Energized 1 min. or more
NOTE: If AC current is used, employ a rectifier.

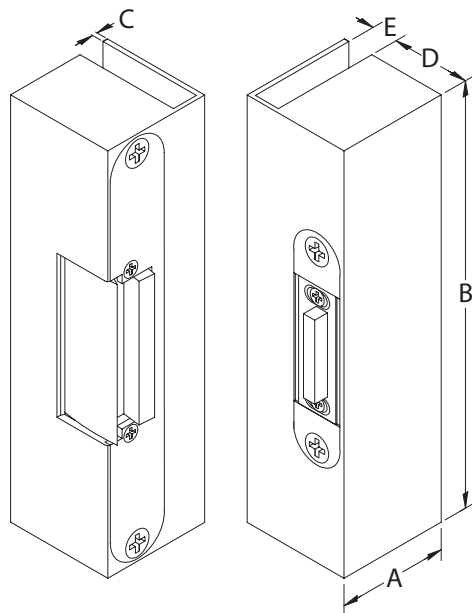

Profiles						
Measurements	A	B	C	D	E	F
Fractional Inches	1-37/64	5-3/4	1/8	1-11/64	—	—
Decimal Inches	1.575	5.750	0.125	1.172	0.3937	0.4724
Metric mm	40.00	146.00	3.00	29.77	10.00	12.00

NOTE: Site dimensions are the installer's or frame manufacturer's responsibility. Horizontal centerlines are located by bolt location.

NOTE: Not to scale. Specifications are subject to change without notice.

RCI also offers a complete line of Electromagnetic Locks, Electric Strikes, Power Supplies, Switches, Keypads & Readers, Exit Devices, Systems & Door Hardware.