

5897-35

Wireless DUAL TEC® Motion Sensor



Honeywell's 5897-35 Wireless DUAL TEC® Motion Sensor provides reliable detection with improved false alarm immunity for tough commercial environments

KEY FEATURES

- Microwave/PIR Technology
- Automatic Walk Test
- Pet Alley and Barrier Lens Included
- Wireless Technology

SPECIFICATIONS

Detection Method

- Microwave 2.45 GHz
- Dual element passive infrared

Coverage

- 35' x 30' (11m x 9m)

Detection Zones

- 24 Zones (11 long range, 7 intermediate, 4 lower, 2 look-down)

Optional Lenses (Included)

- Barrier lenses
 - 35' x 11' (11m x 3m)
- Pet Alley
 - 35' x 30' (11m x 9m)

Sensitivity

- 2-4 Steps

Temperature compensation

- Temperature compensation adjusts for ambient temperature for improved performance

Automatic Walk mode

- Enabled simply by opening and closing the cover. After eight minutes, normal operation is resumed

Microwave Range Adjustable

Microwave Supervision

Mounting Height

- 7ft. 6 inches

Power

- Four 3V Batteries (included)
- Replace only with Honeywell/Ademco #466 Panasonic CR123A Sanyo CR123A Duracell DL123A or Varta CR123A (Lithium Manganese Dioxide)

Case Tamper protection

Operating Temperature

- 32° to 140°F (0°C to +60°C)

Operating Humidity

- Up to 95% RH (max), non-condensing

PIR White Light Immunity

- >4000 Lux

RIF Immunity

- 30V/M, 10 MHz - 1000 MHz

Dimensions


- 2 7/8" W x 5 "H x 2 5/16" D (max protrusion) (7cm x13cm x 6cm)

Compatibility

- Compatible with all 5800 Series wireless devices

Agency Listings

- FCC • IC • Ctick • cULus

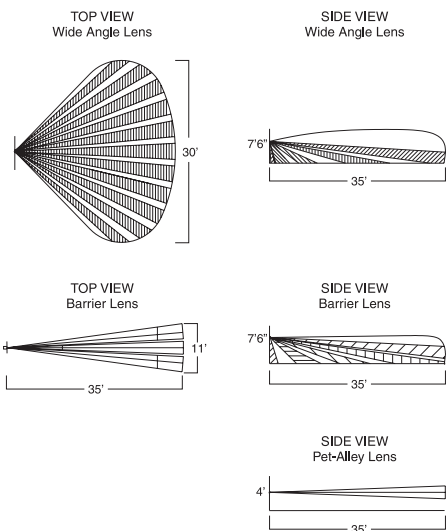

ORDERING

5897-35 Wireless DUAL TEC® Motion Sensor

Honeywell Security & Custom Electronics
 PO Box 9035, Syosset, NY 11791
www.security.honeywell.com/sce